

BARAT LED1x8700 H124 T840 PC/PC OP LT80 • 1107709



Product:	Barat LED1x8700 H124 T840 PC/PC OP LT80
Order code:	1107709
Family:	Barat LED
Product group:	Waterproof and cleanroom luminaires

GENERAL DATA

Description:	Surface mounted or suspended waterproof LED luminaire, basic version Light distribution type: direct Optical system: opal polycarbonate diffuser, UV stable, impact resistant Housing: polycarbonate Colour: light grey
Installation:	On the ceiling or wall (mounting brackets included), or suspended (hooks included). Push-in terminal, 5x2x2.5mm2
Environment	Indoor/outdoor with roof
Application	public place, industry, warehouse, hall, parking area, sports, transport terminal

ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	59.7
Power factor:	0.94	Control gear:	ECG on/off
Integrated sensor:	None	Surge protection (L to N), kV:	1
Surge protection (L/N to PE), kV:	2	Inrush current (Imax/time):	35A/ 300µs
Connection:	Push-in terminal, 5x2x2.5mm2		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	8666	System efficacy, lm/W:	145
CRI (Ra):	80+	CCT, K:	4000
SDCM:	3	Light Distribution:	Wide-wide beam (C0-C180 plane 76 ...125 , C90-C270 plane 76 ...125)
Distribution Type:	Direct	Beam angle, °:	125x103
LED lifetime, h:	50000/L80B10	Ripple current (≤120 Hz), %:	≤5

TECHNICAL DATA

Net weight, kg:	2.6	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0204	Pallet quantity, pcs:	84
Dimensions, mm:	1572x96x111		


STANDARDS

Operating temperature range, °C:	ta -20...+35	Protection class IEC:	I
Ingress protection code:	IP66	Mechanical impact resistance:	IK10
Protection symbol:	D	Glow wire test, °C:	850


EEC:	C	Certificates:	CE, UKCA, RoHS
-------------	---	----------------------	----------------

Warranty:	3 years (5 years - see warranty Ts and Cs)
------------------	--

Technical drawing (.jpg)

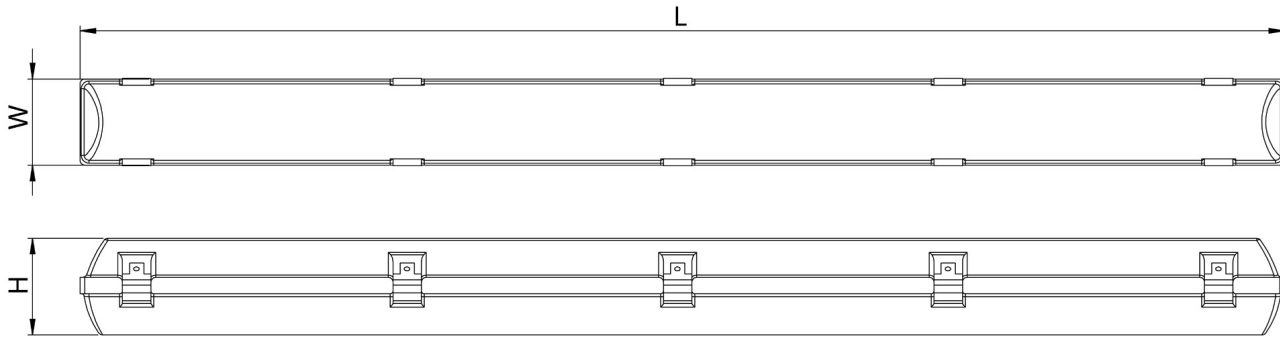

Light distribution curve (.jpg)

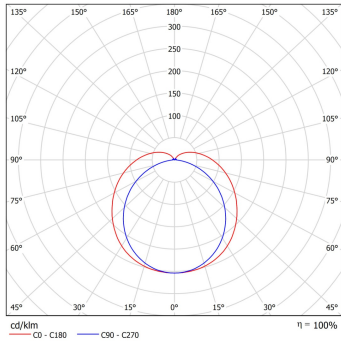

Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.