

PRODUCT FAMILY DATASHEET

LEDVANCE SPOT LED FIREPROOF

LED spotlight luminaires



AREAS OF APPLICATION

- Replacement of halogen lamp spotlights
- Hotel rooms
- Bars, restaurants
- Bathrooms
- Accent lighting
- Galleries, museums
- General illumination
- Outdoor

PRODUCT BENEFITS

- High luminous efficacy
- Design matches the LEDVANCE DOWNLIGHT luminaire family
- Energy savings of up to 90 % compared to halogen lamp spotlights
- Functional and minimalistic design
- Easy installation with fast connection
- External driver for extended flexibility (compatible with selected dim. drivers)
- Designed for extra IP protection

PRODUCT FEATURES

- Fire-resistant (up to 90 minutes, tested in accordance with EN 1365-2:2014 'fire resistance tests for loadbearing elements - Part 2: Floors and roofs')
- Outdoor use and fire-resistant (up to 90 minutes, BS476-20:1987 and BS476-21:1987)
- Compatible with standard ceiling cutouts of 68 mm
- Initial color consistency: ≤ 4 SDCM



- Type of protection, front side: IP65





TECHNICAL DATA

Product description	Electrical data					Photometrical data				Light technical data	Dimensions & weight
	Operating mode	Nominal wattage	Nominal voltage	Power factor λ	Mains frequency	Color temperature	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	Diameter
SPOT LED 68 7 W 3000 K IP65 FP WT	Electronic control gear (ECG)	7.00 W	220...240 V	>0.90	50/60 Hz	3000 K	530 lm	Warm White	>80	38.00 °	90.0 mm
SPOT LED 68 8 W 3000 K IP65 FP DIM WT	Electronic control gear (ECG)	8.00 W	220...240 V	>0.90	50/60 Hz	3000 K	620 lm	Warm White	>80	36 °	81.0 mm
SPOT LED 68 8 W 4000 K IP65 FP DIM WT	Electronic control gear (ECG)	8.00 W	220...240 V	>0.90	50/60 Hz	4000 K	670 lm	Cool White	>80	36 °	81.0 mm
SPOT LED 68 8 W 3000 K IP65 FP DIM SI	Electronic control gear (ECG)	8.00 W	220...240 V	>0.90	50/60 Hz	3000 K	620 lm	Warm White	>80	36 °	81.0 mm
SPOT LED 68 8 W 4000 K IP65 FP DIM SI	Electronic control gear (ECG)	8.00 W	220...240 V	>0.90	50/60 Hz	4000 K	670 lm	Cool White	>80	36 °	81.0 mm

Product description	Height	Mounting diameter	Colors & materials		Temperatures & operating conditions	Lifespan		
			Body material	Product color	Ambient temperature range	Lifespan L70 at 25 °C	Lifespan L80 at 25 °C	Lifespan L90 at 25 °C
SPOT LED 68 7 W 3000 K IP65 FP WT	72.0 mm	68 mm	Aluminum	White	-20...45 °C	50000 h	40000 h	20000 h
SPOT LED 68 8 W 3000 K IP65 FP DIM WT	51.0 mm	68 mm	Aluminum	White	-20...45 °C	50000 h	40000 h	20000 h
SPOT LED 68 8 W 4000 K IP65 FP DIM WT	51.0 mm	68 mm	Aluminum	White	-20...45 °C	50000 h	40000 h	20000 h
SPOT LED 68 8 W 3000 K IP65 FP DIM SI	51.0 mm	68 mm	Aluminum	Silver	-20...45 °C	50000 h	40000 h	20000 h
SPOT LED 68 8 W 4000 K IP65 FP DIM SI	51.0 mm	68 mm	Aluminum	Silver	-20...45 °C	50000 h	40000 h	20000 h

Product description	Number of switching cycles	Capabilities		Certificates & standards	
		Dimmable	Type of connection	Protection class	Type of protection
SPOT LED 68 7 W 3000 K IP65 FP WT	100000	No	Terminal, 2-pin	II	IP65
SPOT LED 68 8 W 3000 K IP65 FP DIM WT	100000	Yes	Terminal, 2-Pole (L, N)	II	IP65
SPOT LED 68 8 W 4000 K IP65 FP DIM WT	100000	Yes	Terminal, 2-Pole (L, N)	II	IP65
SPOT LED 68 8 W 3000 K IP65 FP DIM SI	100000	Yes	Terminal, 2-Pole (L, N)	II	IP65
SPOT LED 68 8 W 4000 K IP65 FP DIM SI	100000	Yes	Terminal, 2-Pole (L, N)	II	IP65

Product description	Standards
SPOT LED 68 7 W 3000 K IP65 FP WT	CE/CB/TÜV SÜD/EAC/RoHS
SPOT LED 68 8 W 3000 K IP65 FP DIM WT	CE/CB/TÜV SÜD/EAC/RoHS
SPOT LED 68 8 W 4000 K IP65 FP DIM WT	CE/CB/TÜV SÜD/EAC/RoHS
SPOT LED 68 8 W 3000 K IP65 FP DIM SI	CE/CB/TÜV SÜD/EAC/RoHS
SPOT LED 68 8 W 4000 K IP65 FP DIM SI	CE/CB/TÜV SÜD/EAC/RoHS

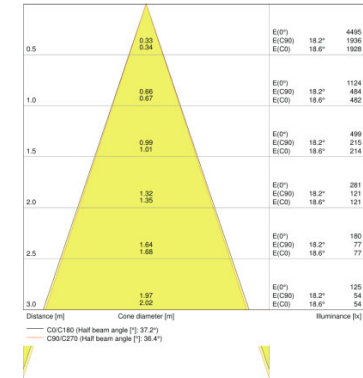
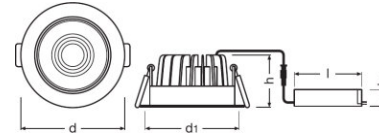

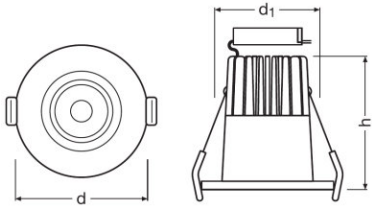


SPOT LED 68 7 W 3000 K IP65 FP WT

SPOT LED 68 8 W 3000 K IP65 FP DIM WT, SPOT LED 68 8 W 4000 K IP65 FP DIM WT

SPOT LED 68 8 W 3000 K IP65 FP DIM SI, SPOT LED 68 8 W 4000 K IP65 FP DIM SI

SPOT LED 68 7 W 3000 K IP65 FP WT

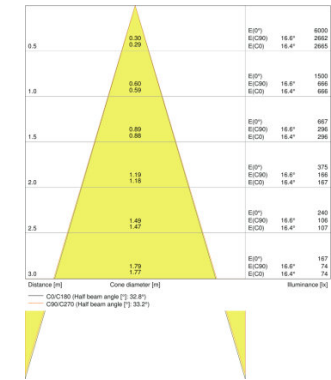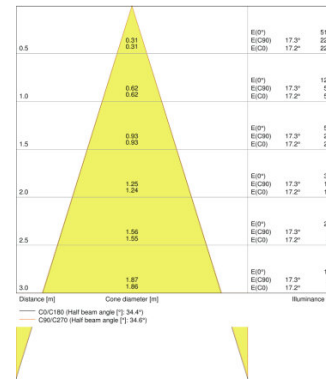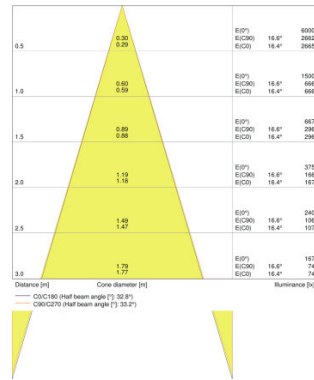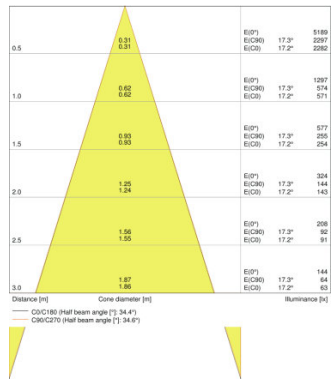

SPOT LED 68 8 W 3000 K IP65 FP DIM WT

SPOT LED 68 8 W 4000 K IP65 FP DIM WT

SPOT LED 68 8 W 3000 K IP65 FP DIM SI

SPOT LED 68 8 W 4000 K IP65 FP DIM SI

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075000209	SPOT LED 68 7 W 3000 K IP65 FP WT	Shipping carton box 20	525 mm x 400 mm x 250 mm	52.50 dm ³	8289.00 g
4058075811171	SPOT LED 68 8 W 3000 K IP65 FP DIM WT	Shipping carton box 27	440 mm x 320 mm x 360 mm	50.69 dm ³	10.11 g
4058075811195	SPOT LED 68 8 W 4000 K IP65 FP DIM WT	Shipping carton box 27	440 mm x 320 mm x 360 mm	50.69 dm ³	10.11 g
4058075811218	SPOT LED 68 8 W 3000 K IP65 FP DIM SI	Shipping carton box 27	440 mm x 320 mm x 360 mm	50.69 dm ³	10.11 g
4058075811232	SPOT LED 68 8 W 4000 K IP65 FP DIM SI	Shipping carton box 27	440 mm x 320 mm x 360 mm	50.69 dm ³	10.11 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.