
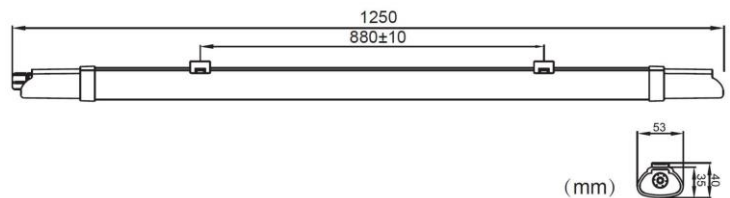


WARNING
CAUTION FOR ELECTRIC SHOCK/RISK OF BURN/PROPER INSTALLATION
■ Non-professionals are not allowed to operate. Shut off the power before maintenance.

LED-OH-36NW

IP65 LED armature

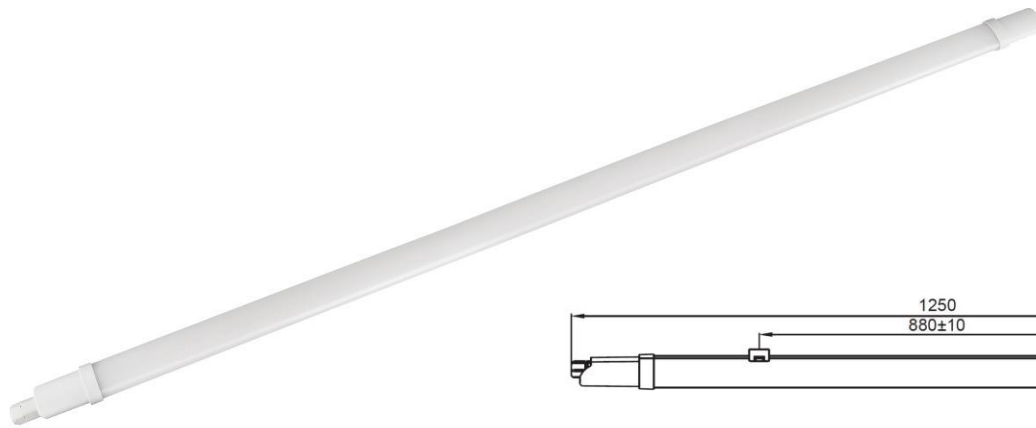

Technical specification and light distribution

Input Voltage	90-264 ACV 50Hz/60Hz
Input Power	36w ± 2%
LED chips	Epistar SMD
CRI	>80Ra
Lumens	3500lm
Color Temp	4000k Natural White
Power supply	Built in
Working Temp	-20 to +50 degree C°
Input Power Factor	0.95
Input Effective Current	Min 0.1 Max 0.15
Input Power	Min 9.5 Max 11.5
Harmonic Distortion	20%
MTBF L70	≥50 000H
Heat Sink	Max less than 70°c
Weight	0.5 KG
Temp Power Drift	10%
Lighting On/Off Lamp time	100ms
Beam Angle	120°
H.V Test	3000VAC<5mA 60s L,N--GND
Insulation Resistance	1000VDC>10M Primary-subprime
Leakage Current	264VAC/50Hz/60Hz <3.5mA L,N--GND
Housing material	PC+PC
Protection grade	IP65
Warranty Time	2 years

