



# Ledinaire panel

## RC065B G5 41S/840 PSU W60L60 NOC CFW

Ledinaire panel, 34 W, 600x600 mm, VPC, 4100 lm, 4000 K

The Philips Ledinaire panel Gen5 (RC065B/RC066B) range features a selection of popular off-the-shelf LED luminaires that offer Philips high quality at a competitive price. Reliable, energy-efficient and affordable, this latest generation of 600 x 600 mm, 620 x 620 mm, 300 x 1200 mm, and 600 x 1200 Ledinaire LED panel lights are designed for diffuse, comfortable lighting in a wide range of general lighting applications. Our range of Ledinaire panels lighting is also available with accessories for easy installation on different types of ceilings—just what you need.

### Product data

General Information		Operating and Electrical	
Number of gear units	1 unit	Input Voltage	220 to 240 V
Driver included	Yes	Line Frequency	50 or 60 Hz
Value ladder	Value	Inrush current	22 A
<b>Light Technical</b>		Inrush time	0.25 ms
Luminous Flux	4,100 lm	Power Consumption	34 W
Luminous Efficacy (rated) (Nom)	120 lm/W	Power Factor (Fraction)	0.9
Correlated Color Temperature (Nom)	4000 K	Connection	Flying leads/wires
Color rendering index (CRI)	80	Cable	2×0.75mm <sup>2</sup>
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1	Number of products on MCB of 16 A type B	10
Beam angle of light source	120 degree(s)	<b>Temperature</b>	
Light source color	840 neutral white	Ambient temperature range	-10 to +35 °C
Optic type	Beam angle 120°	<b>Controls and Dimming</b>	
Luminaire light beam spread	120°	Dimmable	No
Unified glare rating CEN	22	Driver/power unit/transformer	Power supply unit external (On/Off)
		Control interface	-

## Ledinaire panel

Constant light output	No
<b>Mechanical and Housing</b>	
Housing Material	Steel
Reflector material	Acrylate
Optic material	Polystyrene
Optical cover material	Acrylate
Fixation material	-
Housing Color	White
Optical cover finish	Microprismatic lens
Overall length	595 mm
Overall width	595 mm
Overall height	59 mm
Dimensions (Height x Width x Depth)	59 x 595 x 595 mm
Compatible ceiling or ceiling installation accessory type	Visible profile ceiling version
<b>Approval and Application</b>	
Ingress protection code	IP20/40 [Finger-protected;Wire-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	-
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	CE mark
ENEC mark	-
Warranty period	3 years
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
Photobiological risk specification	0.2 m
EU RoHS compliant	Yes


<b>Initial Performance (IEC Compliant)</b>	
Luminous flux tolerance	-10% / +10%
Initial chromaticity	(0.38, 0.38) SDCM ≤5
Power consumption tolerance	+/-10%

<b>Over Time Performance (IEC Compliant)</b>	
Control gear failure rate at median useful life 50000 h	7.5 %
Lumen maintenance at median useful life* 50000 h	L80
Lumen maintenance at median useful life* 75000 h	-

<b>Application Conditions</b>	
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Not applicable

<b>Product Data</b>	
Order product name	RC065B G5 41S/840 PSU W60L60 NOC CFW
Full product name	RC065B G5 41S/840 PSU W60L60 NOC CFW
Full product code	872016951659599
Order code	911401875985
Material Nr. (12NC)	911401875985
Numerator - Quantity Per Pack	1
Net Weight (Piece)	1.350 kg
EAN/UPC - Product/Case	8720169516595
Numerator - Packs per outer box	4
EAN/UPC - Case	8720169516823

## Dimensional drawing

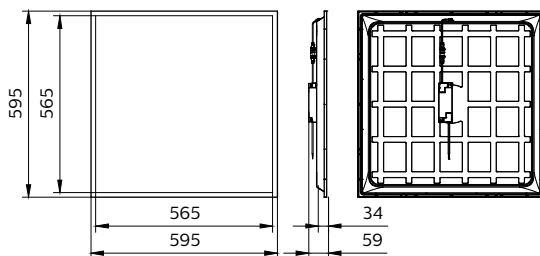

## Ledinaire panel

