

PRODUCT DATASHEET

LED FACADE SPOT 8 W 3000 K GY

LEDVANCE OUTDOOR LED FACADE SPOT | Luminaires with rotatable head and directional light



AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Adjustable modules: rotation angle 320°
- Diffuser made of opal polycarbonate
- Available in two housing colors: white and dark gray



TECHNICAL DATA

Electrical data

| | |
|------------------------------------------|---------------|
| Operating mode | Mains voltage |
| Mains frequency | 50/60 Hz |
| Power factor λ | >0.5 |
| Nominal wattage | 8.00 W |
| Nominal voltage | 220...240 V |
| Nominal current | 0.066 A |



Photometrical data


| | |
|---------------------------------------------|---------------------|
| Luminous efficacy | 55 lm/W |
| Luminous flux | 440 lm |
| Color temperature | 3000 K |
| Light color (designation) | Warm White |
| Color rendering index Ra | ≥ 80 |
| Standard deviation of color matching | <6 sdc _m |

Light technical data

| | |
|-------------------|-------|
| Beam angle | 110 ° |
|-------------------|-------|

Dimensions & weight

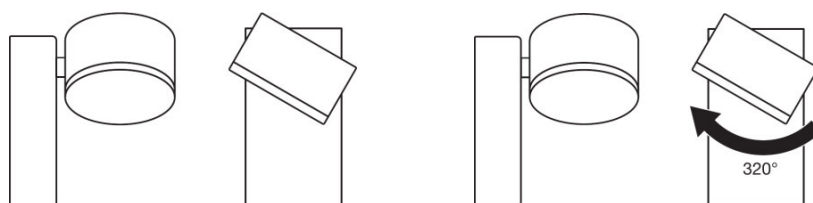

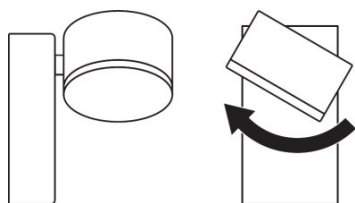

| | |
|-----------------------|----------|
| Length | 135.0 mm |
| Width | 90.0 mm |
| Height | 140.0 mm |
| Product weight | 600.00 g |

Colors & materials

| | |
|----------------------|----------|
| Housing color | Gray |
| Product color | Gray |
| Body material | Aluminum |

Temperatures & operating conditions

| | |
|---------------------------------------|-------------|
| Temperature range in operation | -20...40 °C |
| Ambient temperature range | -20...40 °C |

Lifespan

| | |
|-----------------------------------|-------|
| Number of switching cycles | 15000 |
|-----------------------------------|-------|

Additional product data

| | |
|--------------------------|------------------------------|
| Mounting location | Wall |
| Product remark | Available from February 2018 |

Capabilities

| | |
|-------------------------------|-----------------------------|
| Type of connection | Terminal, 3-Pole (L, N, PE) |
| Dimmable | No |
| LED module replaceable | Not replaceable |


Certificates & standards

| | |
|-----------------------------------------------|------|
| Type of protection | IP54 |
| Protection class | I |
| Protection class IK (shock resistance) | IK06 |
| Photobiological safety group | RG 0 |

Standards

CE

Light Distribution

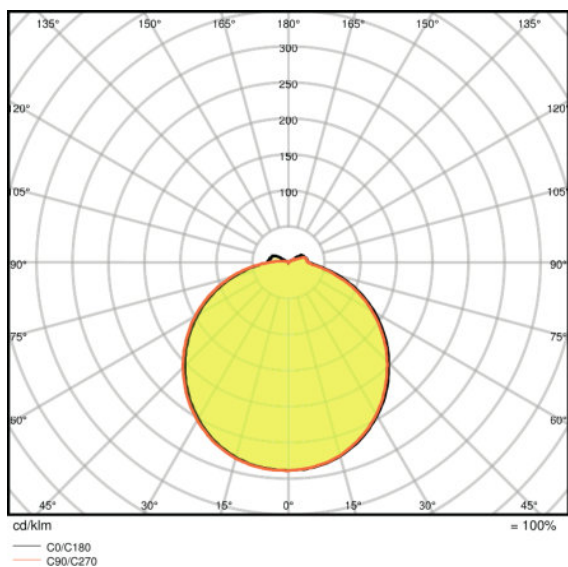

LDC typ polar

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|-------------------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4058075074712 | LED FACADE SPOT 8 W 3000 K GY | Shipping carton box 6 | 385 mm x 170 mm x 355 mm | 23.23 dm ³ | 4072.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

- ▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.