

PRODUCT DATASHEET

LED FACADE SPOT 8 W 3000 K WT

LEDVANCE OUTDOOR LED FACADE SPOT | Luminaires with rotatable head and directional light



AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Adjustable modules: rotation angle 320°
- Diffuser made of opal polycarbonate
- Available in two housing colors: white and dark gray



TECHNICAL DATA

Electrical data

Operating mode	Mains voltage
Mains frequency	50/60 Hz
Power factor λ	>0.5
Nominal wattage	8.00 W
Nominal voltage	220...240 V
Nominal current	0.066 A



Photometrical data


Luminous efficacy	60 lm/W
Luminous flux	460 lm
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥ 80
Standard deviation of color matching	<6 sdc _m

Light technical data

Beam angle	110 °
-------------------	-------

Dimensions & weight

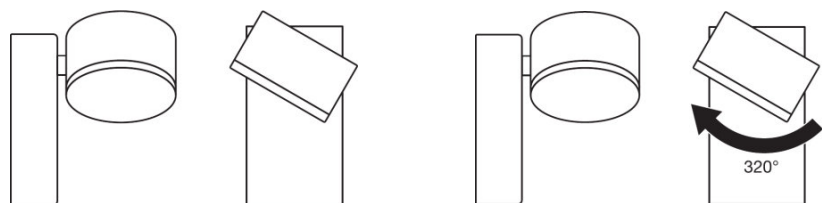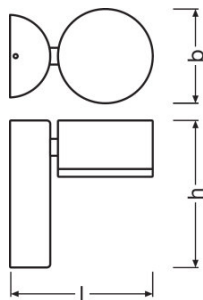

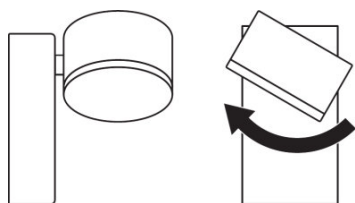

Length	135.0 mm
Width	90.0 mm
Height	140.0 mm
Product weight	600.00 g

Colors & materials

Housing color	White
Product color	White
Body material	Aluminum

Temperatures & operating conditions

Temperature range in operation	-20...40 °C
Ambient temperature range	-20...40 °C

Lifespan

Number of switching cycles	15000
-----------------------------------	-------

Additional product data

Mounting location	Wall
Product remark	Available from February 2018

Capabilities

Type of connection	Terminal, 3-Pole (L, N, PE)
Dimmable	No
LED module replaceable	Not replaceable

Certificates & standards

Type of protection	IP54
Protection class	I
Protection class IK (shock resistance)	IK06
Photobiological safety group	RG 0

Standards

CE

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075074736	LED FACADE SPOT 8 W 3000 K WT	Shipping carton box 6	385 mm x 170 mm x 355 mm	23.23 dm ³	4072.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

- ▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.