

# PRODUCT DATASHEET

## LED FACADE POLE 6 W 3000 K SST

LEDVANCE OUTDOOR LED FACADE POLE | Stainless steel wall-luminaires with indirect illumination



---

### AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

---

### PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Special light guide design for low-glare illumination

---

### PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP44
- Housing made of Polycarbonate covered with stainless steel
- Available as wall, ceiling and bollard luminaires
- Available with and without motion sensor
- Diffuser made of transparent polycarbonate



**TECHNICAL DATA**

Electrical data

|  |               |
|--|---------------|
| <b>Operating mode</b>                    | Mains voltage |
| <b>Mains frequency</b>                   | 50/60 Hz      |
| <b>Power factor <math>\lambda</math></b> | >0.5          |
| <b>Nominal wattage</b>                   | 6.00 W        |
| <b>Nominal voltage</b>                   | 220...240 V   |
| <b>Nominal current</b>                   | 0.06 A        |


Photometrical data

|   |                     |
|---|---------------------|
| <b>Luminous efficacy</b>                    | 60 lm/W             |
| <b>Luminous flux</b>                        | 360 lm              |
| <b>Color temperature</b>                    | 3000 K              |
| <b>Light color (designation)</b>            | Warm White          |
| <b>Color rendering index Ra</b>             | $\geq 80$           |
| <b>Standard deviation of color matching</b> | <6 sdc <sub>m</sub> |

Light technical data

|                   |       |
|-------------------|-------|
| <b>Beam angle</b> | 160 ° |
|-------------------|-------|

Dimensions & weight



|                       |          |
|-----------------------|----------|
| <b>Length</b>         | 138.0 mm |
| <b>Width</b>          | 102.0 mm |
| <b>Height</b>         | 135.0 mm |
| <b>Product weight</b> | 470.00 g |

Colors & materials

|                      |       |
|----------------------|-------|
| <b>Housing color</b> | Steel |
| <b>Product color</b> | Steel |

|                      |                 |
|----------------------|-----------------|
| <b>Body material</b> | Stainless steel |
|----------------------|-----------------|

### Temperatures & operating conditions

|                                       |             |
|---------------------------------------|-------------|
| <b>Temperature range in operation</b> | -20...40 °C |
| <b>Ambient temperature range</b>      | -20...40 °C |

### Lifespan

|                                   |         |
|-----------------------------------|---------|
| <b>Number of switching cycles</b> | 15000   |
| <b>Lifespan L70 at 25 °C</b>      | 30000 h |

### Additional product data

|                          |                              |
|--------------------------|------------------------------|
| <b>Mounting location</b> | Wall                         |
| <b>Product remark</b>    | Available from February 2018 |


### Capabilities

|                               |                         |
|-------------------------------|-------------------------|
| <b>Type of connection</b>     | Terminal, 2-Pole (L, N) |
| <b>Dimmable</b>               | No                      |
| <b>LED module replaceable</b> | Not replaceable         |

### Certificates & standards

|   |      |
|---|------|
| <b>Type of protection</b>                     | IP44 |
| <b>Protection class</b>                       | II   |
| <b>Protection class IK (shock resistance)</b> | IK06 |
| <b>Photobiological safety group</b>           | RG 0 |
| <b>Standards</b>                              | CE   |

Light Distribution

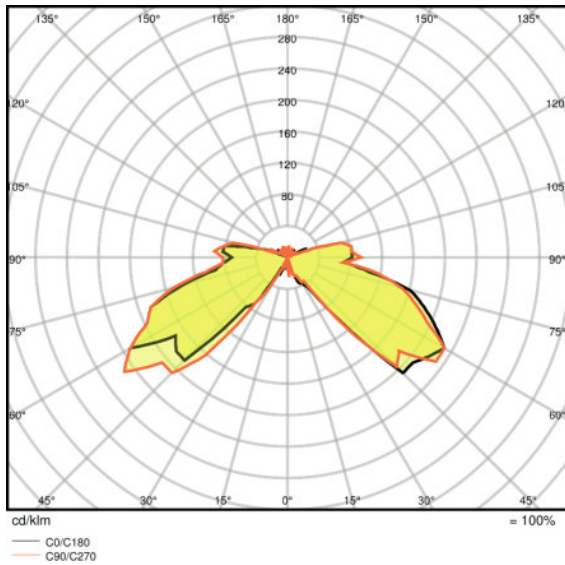

LDC typ polar

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

| Product code  | Product description            | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume                | Gross weight |
|---------------|--------------------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4058075075092 | LED FACADE POLE 6 W 3000 K SST | Shipping carton box<br>6     | 380 mm x 175 mm x 320 mm             | 21.28 dm <sup>3</sup> | 3291.00 g    |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see  
 ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.